




Inversor Conectado a la red

Trifásico: GT3-4K/5K/6K/8K/10K/12K/15K/17K/20K/22K/25K D1

El inversor LIVOLTEK GT3-4/5/6/8/10/12/15/17/20/22/25K-D1 PV está desarrollado para uso residencial o comercial y para clientes especiales que necesitan un modelo de techo trifásico. El sistema integrado de gestión de fijación de cortinas garantiza que el inversor maximice la producción de energía incluso cuando los paneles fotovoltaicos están ligeramente sombreados. La máquina tiene un módulo AFCI opcional incorporado para evitar incendios eléctricos causados por fallas de arco anormales en el cableado como característica de alta seguridad. Con un voltaje de 160 V y un tiempo de trabajo ultra largo es una opción ideal para grandes centrales eléctricas, comerciales e industriales.

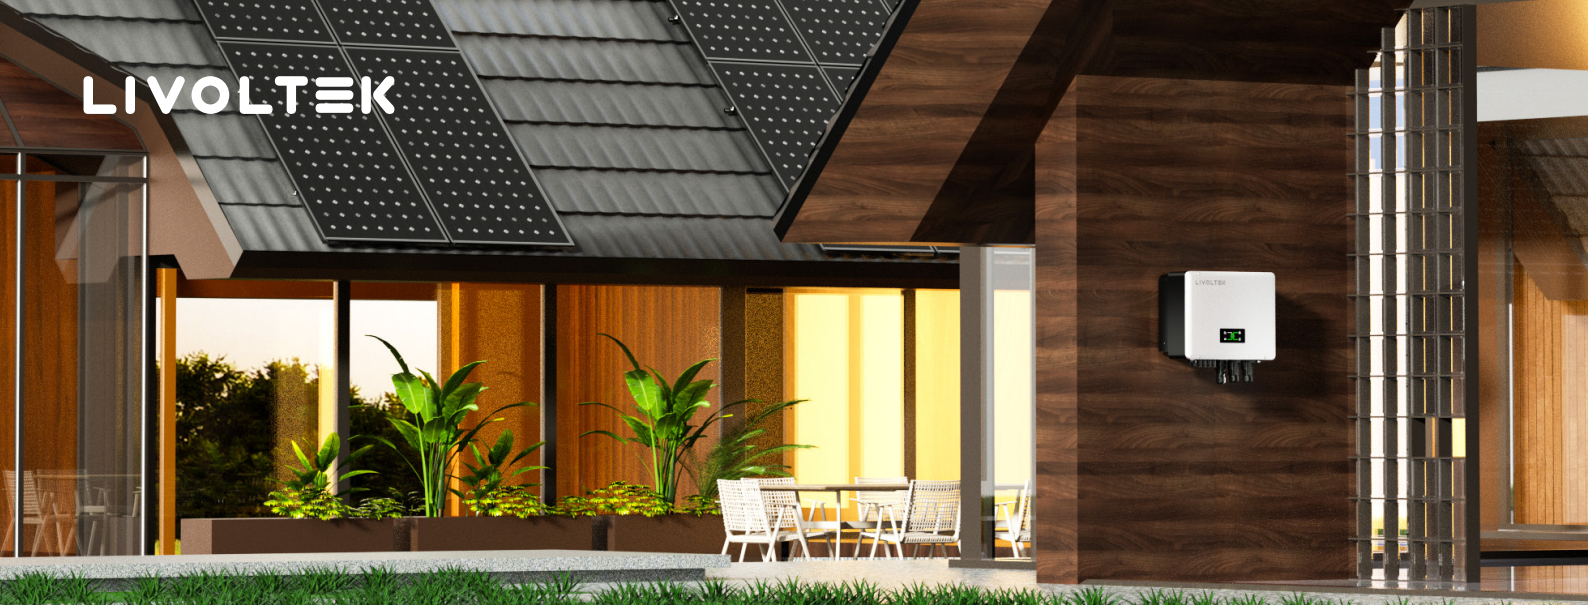

Features

- 150% relación DC/AC
- Limitación de exportación (opcional)
- App inteligente para monitorear y optimizar
- AFCI (opcional)
- La instalación plug-and-play ahorra tiempo
- Salida de CA del 110% para una generación de energía eficiente



Eficiencia máxima 98.6%



Limitación de exportación de soporte



Módulo AFCI integrado interno opcional



Protección SPD II

Productos compatibles



Wi-Fi Dongle



Smart Meter



Sistema de Monitoreo

Especificaciones

Model	GT3-4KD1	GT3-5KD1	GT3-6KD1	GT3-8KD1	GT3-10KD1	GT3-12KD1	GT3-15KD1	GT3-17KD1	GT3-20KD1	GT3-22KD1	GT3-25KD1
PV Input											
Max. PV Input Power	6000Wp	7500Wp	9000Wp	12000Wp	15000Wp	18000Wp	22500Wp	25500Wp	30000Wp	33000Wp	37500Wp
Max. PV Input Voltage	1100V										
Min. PV Input Voltage	140V										
Start-up Input Voltage	160V										
Nominal Input Voltage	650V										
MPPT Voltage Range	140V-1000V										
Max. PV Input Current	16A+16A					40A+20A		40A+40A			
Max. Short Circuit Current	21A+21A					52A+26A		52A+52A			
No. of MPPTs	2					2		2			
No. of Strings per MPPT	1/1					2/1		2/2			
AC Output											
Nominal AC Power	4000W	5000W	6000W	8000W	10000W	12000W	15000W	17000W	20000W	22000W	25000W
Max. Apparent Power	4400VA	5500VA	6600VA	8800VA	11000VA	13200VA	16500VA	18700VA	22000VA	24200VA	27500VA
Rated AC Grid Output Current	5.8A	7.2A	8.7A	11.5A	14.4A	17.3A	21.7A	24.5A	28.9A	31.8A	36.1A
Max. AC Output Current	6.4A	7.9A	9.5A	12.7A	15.9A	19.1A	23.8A	27.0A	31.8A	34.9A	39.7A
Rated AC Grid Voltage	3/N/PE, 220V/380V, 230V/400V										
AC Grid Voltage Range	270V-480V										
Rated Grid Frequency	50Hz/60Hz										
Grid Frequency Range	45Hz-55Hz/55Hz-66Hz										
Power Factor	> 0.99 Rated Power (Adjustable 0.8 Leading - 0.8Lagging)										
THDi, Rated Power[%]	<3%										
Efficiency											
Max. Efficiency	98.50%	98.50%	98.50%	98.60%	98.60%	98.60%	98.50%	98.50%	98.60%	98.60%	98.60%
Euro Efficiency	98.10%	98.10%	98.10%	98.20%	98.20%	98.20%	98.10%	98.10%	98.20%	98.20%	98.20%
MPPT Efficiency	>99%										
Protection											
Surge Arrester	Type II										
PV Current Detection	Support										
AC Short Circuit Protection	Support										
Anti-islanding Protection	Support										
Residual Current Monitoring Unit	Support										
Integrated AFCI (Arc-Fault Circuit Protection)	Optional										
General Data											
Dimension (W*H*D)	520*420*193mm										
Weight	22kg					24.5kg					
Protection Degree	IP65					IP65					
Cooling	Natural Cooling					Fan Cooling					
Operating Temperature Range	-30°C~ 60°C (Derating at 45°C)					-30°C~ 60°C (Derating at 45°C)					
Typical Noise Emission	<30dB					<40dB					
Night Self Consumption	<1W										
Display	LED+APP										
Communication	RS485 (Meter), Wi-Fi+Bluetooth, DRM										
Certifications and Standards											
Grid Regulation	IEC61727, IEC62116, CQC ABNT NBR 16149, ABNT NBR 16150, CQC(NB/T32004)										
Safety/EMC	IEC62109-1/2, EN61000-6-1/2/3/4										
Standard Warranty	5 Years/10 Years (Optional)										