

4SP14-8

96m-25.5m³/h-450V-5100W



m ³ /h	22.9	21.4	19.6	17.6	15.4	13.4	11.3	8.7	4.1
L/min	382	356	327	294	256	224	189	145	69
H(m)	10	20	30	40	50	60	70	80	90




DC : 5100W
AC : 2200W

DC input : 60-450V
AC input : 90-240V

PFC disponible

- | | | |
|--|--|--|
| ☒ 450w*3pcs | ☒ 340w*4pcs | ☒ 340w*5pcs |
| ☒ 340w*6pcs | ☒ 340w*7pcs | ☒ 340w*8pcs |
| ☒ 340w*9pcs | ☒ 340w*10pcs | ☒ 340w*11pcs |
| ☒ 340w*12pcs | ☒ 340w*13pcs | ☒ 340w*14pcs |
| ☒ 340w*15pcs | ☒ 340w*16pcs | |

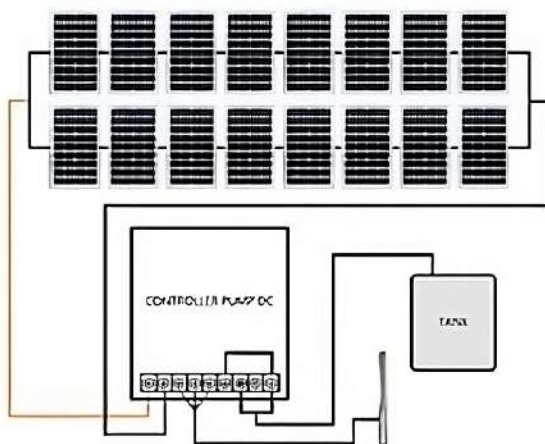

- Híbrido AC/DC, misma función que Grundfos
- Motor Franklin estándar, 95% de calidad Grundfos
- Funcionamiento en seco y toda la protección en el interior
- SS304 de alta calidad
- Material más grueso, más duradero, con más potencia