

4SP5-24

250m-10.2m³/h-450V-5100W



m ³ /h	9.4	8.9	8.3	7.0	6.2	5.5	4.6	4.1	3.3	2.2	1.2
L/min	157	148	139	116	104	92	77	68	55	37	20
H(m)	20	40	80	100	120	140	160	180	200	220	240


1.5"

DC : 5100W
AC : 2200W

DC input : 60-450V
AC input : 90-240V

PFC disponible

- 450w*3pcs
- 340w*4pcs
- 340w*5pcs
- 340w*6pcs
- 340w*7pcs
- 340w*8pcs
- 340w*9pcs
- 340w*10pcs
- 340w*11pcs
- 340w*12pcs
- 340w*13pcs
- 340w*14pcs
- 340w*15pcs
- 340w*16pcs

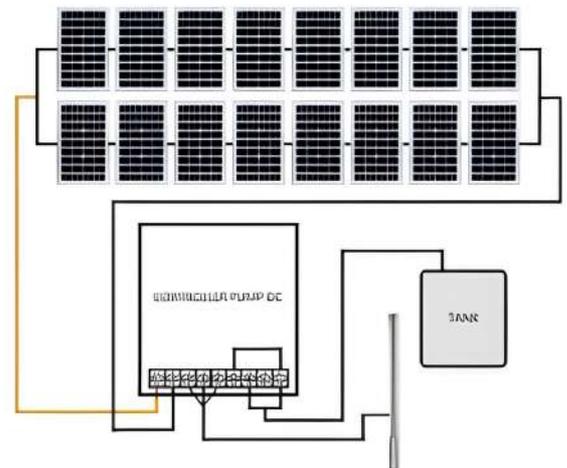


250m

Controller



motor encapsulado

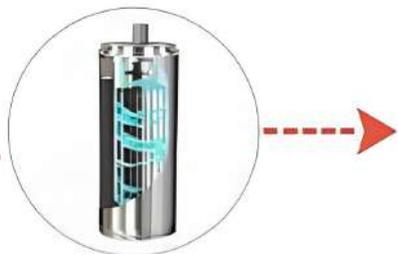

- Híbrido AC/DC, misma función que Grundfos
- Motor Franklin estándar, 95% de calidad Grundfos
- Funcionamiento en seco y toda la protección en el interior
- SS304 de alta calidad
- Material más grueso, más duradero, con más potencia