

6SP60-1

25m-92.7m³/h-450V-5100W



m ³ /h	88.1	78.6	59.3	39.6
L/min	1469	1310	988	660
H(m)	5	10	15	20



25m

Controller



motor
encapsulado




3"

DC : 5100W
AC : 2200W

DC input : 60-450V
AC input : 90-240V

PFC disponible

- ☒ 450w*3pcs
- ☒ 340w*4pcs
- ☒ 340w*5pcs
- ☒ 340w*6pcs
- ☒ 340w*7pcs
- ☒ 340w*8pcs
- ☒ 340w*9pcs
- ☒ 340w*10pcs
- ☒ 340w*11pcs
- ☒ 340w*12pcs
- ☒ 340w*13pcs
- ☒ 340w*14pcs
- ☒ 340w*15pcs
- ☒ 340w*16pcs

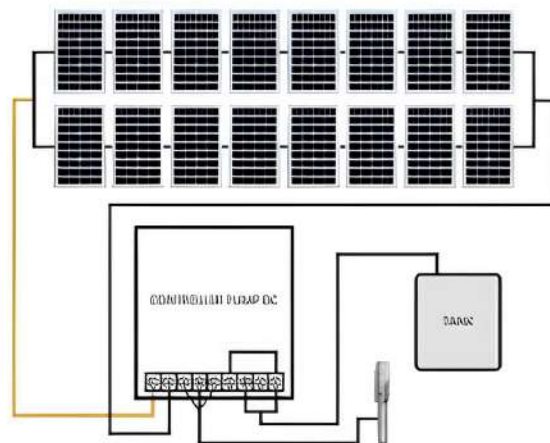

- Híbrido AC/DC, misma función que Grundfos
- Motor Franklin estándar, 95% de calidad Grundfos
- Funcionamiento en seco y toda la protección en el interior
- SS304 de alta calidad
- Material más grueso, más duradero, con más potencia