

### 3SPW1-11P

### 88m-3.6m<sup>3</sup>/h-96V-600W

## 600W

1.5"

| m <sup>3</sup> /h | 3.6 | 3.4 | 3.1 | 2.8 | 2.4 | 1.9 | 1.5 | 1.1 | 0.6 | 0.0 |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| L/min             | 60  | 57  | 52  | 47  | 40  | 32  | 25  | 18  | 10  | 0   |
| H(m)              | 0   | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 88  |




88m

40-90V



Encapsulated motor

- ✓ Automatic dry running protection
- ✓ Standard Franklin Engine
- ✓ High quality SS304 stainless steel
- ✓ Thicker material, more durable, more power.

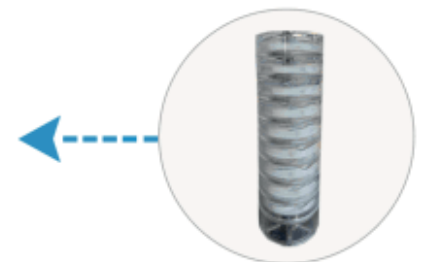

✓ 340w\*2pcs

