



4SP5-24

250m-10.2m³/h-450V-5100W

m ³ /h	9.4	8.9	8.3	7.0	6.2	5.5	4.6	4.1	3.3	2.2	1.2
L/min	157	148	139	116	104	92	77	68	55	37	20
H(m)	20	40	80	100	120	140	160	180	200	220	240

1.5"

DC : 5100W

AC : 2200W

DC input : 60-450V

AC input : 90-240V

PFC disponible

- | | | |
|--|--|--|
| ☒ 450w*3pcs | ☒ 340w*4pcs | ☒ 340w*5pcs |
| ☒ 340w*6pcs | ☒ 340w*7pcs | ☒ 340w*8pcs |
| ☒ 340w*9pcs | ☒ 340w*10pcs | ☒ 340w*11pcs |
| ☒ 340w*12pcs | ☒ 340w*13pcs | ☒ 340w*14pcs |
| ☒ 340w*15pcs | ☒ 340w*16pcs | |




250m

Controller



encapsulated motor

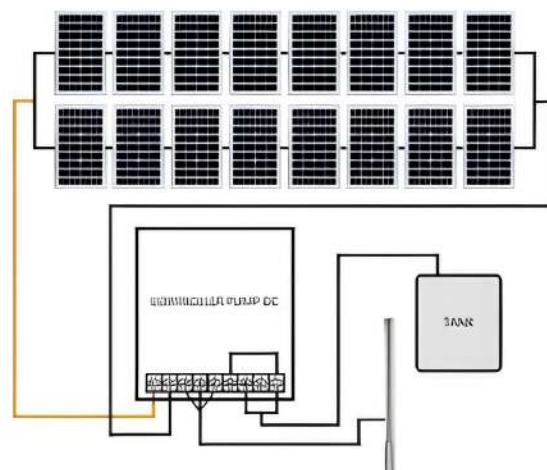

- AC/DC hybrid, same function as Grundfos
- Standard Franklin motor, 95% Grundfos quality
- Dry running and all protection inside
- High quality SS304
- Thicker material, more durable, with more power